




FEATURES

- The plastic package carries Underwrites Laboratory
- Flammability Classification 94V-0
- High forward current capability
- High surge current capability
- Construction utilizes void-free molded plastic technique
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHs 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- *Case:* R-6 molded plastic body
- *Terminals:* Plated axial lead, solderable per MIL-STD-750,method 2026
- *Polarity:* Color band denotes cathode end
- *Mounting Position:* Any
- *Weight:* 0.07ounce, 2.1 grams

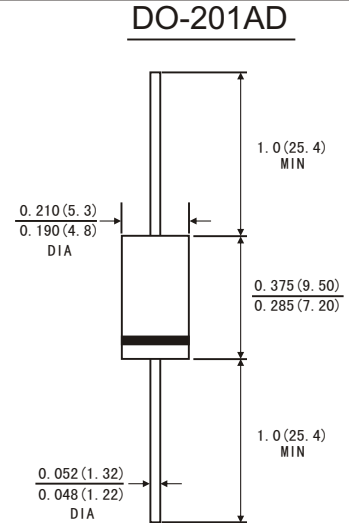

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave 60Hz,,resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	10A05	10A1	10A2	10A3	10A4	10A6	10A8	10A10	Unis
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length $T_A=60^\circ\text{C}$	$I_{(AV)}$	10.0								Amps
Peak forward surge current (8.3ms half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	500.0								Amps
Maximum instantaneous forward voltage at 10.0 A	V_F	1.0								Volts
Maximum reverse current at rated DC blocking voltage	I_R	$T_c = 25^\circ\text{C}$								μA
		$T_c = 100^\circ\text{C}$								
Maximum Full Load Reverse Current, Full Cycle Average .375" (9.5mm) Lead Length @ $T_A=75^\circ\text{C}$	$HTIR$	5.0								μA
Typical thermal resistance (Note 2)	$R_{\theta JC}$	2.5								$^\circ\text{C/W}$
Typical junction capacitance (Note 1)	C_J	100								pF
Operating and Storage temperature range	T_J T_{STG}	-65 to+175								$^\circ\text{C}$

Note: 1.Measured at 1MHz and applied reverse voltage of 4.0V D. C .
2.Mounton Cu-Pad Size 16mm×16mm on P. C. B.



RATINGS AND CHARACTERISTIC CURVES 10A05 THRU 10A10

FIG.1-FORWARD CURRENT DERATING CURVE

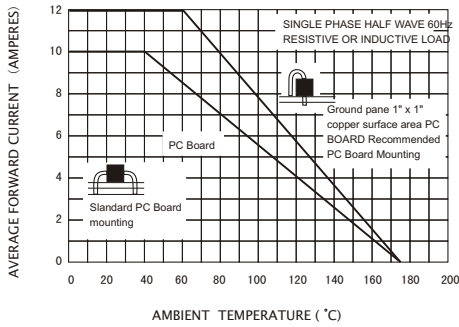


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

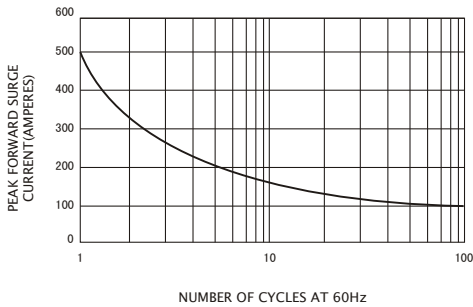


FIG.5-TYPICAL JUNCTION CAPACITANCE

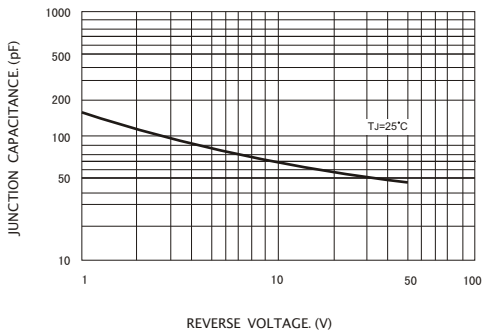


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

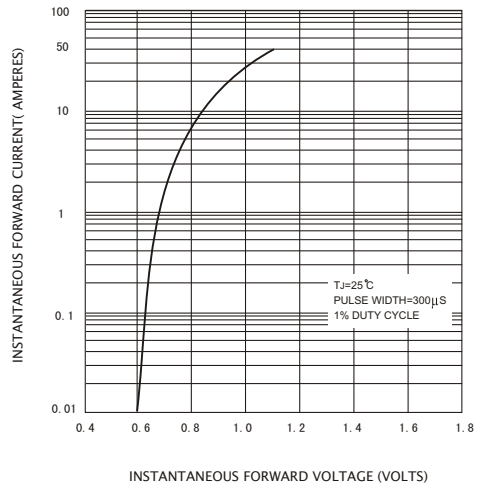


FIG.4-TYPICAL REVERSE CHARACTERISTICS

