


## BAT42WS-BAT43WS

### SOD-323

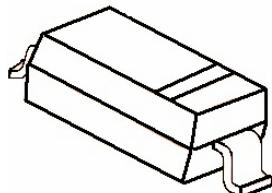

**Marking:** BAT42WS: S7  
BAT43WS: S8

### SOD-323 贴片塑封肖特基二极管 SOD-323 Plastic-Encapsulate Schottky Barrier Diode

#### 特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop

#### 机械数据 Mechanical Data

- 封装: SOD-323 封装 SOD-323 Small Outline Plastic Package
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性( $T_A = 25^\circ\text{C}$  除非另有规定)

**Maximum Ratings & Thermal Characteristics** (Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	BAT42WS/BAT43WS		单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	VRRM	30		V
最大均方根电压 Maximum RMS voltage	VRMS	21		V
最大直流阻断电压 Maximum DC blocking voltage	VDC	30		V
最大正向平均整流电流 Maximum average forward rectified current	IFM	200		mA
峰值重复正向电流 Repetitive Peak Forward Current @ $t < 1.0\text{s}$	IFRM	500		mA
峰值正向浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	IFSM	4.0		A
典型热阻 Typical thermal resistance	R <sub>θJA</sub>	500		°C/W
功率消耗 Power Dissipation	PD	200		mW
结温 Junction Temperature	T <sub>j</sub>	125		°C
存储温度 Storage temperature range	T <sub>STG</sub>	-55~+150		°C

电特性 ( $T_A = 25^\circ\text{C}$  除非另有规定)


**Electrical Characteristics** (Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified).

参数 Parameters	符号 Symbol	测试条件 Test conditions	Min	Typ	Max	单位 Unit
最大正向电压 Maximum forward voltage	BAT42WS/BAT43WS	V <sub>F</sub>	IF = 200mA		1.0	V
		V <sub>F</sub>	IF = 10mA		0.40	
		V <sub>F</sub>	IF = 50mA		0.65	
		V <sub>F</sub>	IF = 2.0mA	0.26	0.33	
		V <sub>F</sub>	IF = 15mA		0.45	
最大反向电压 Maximum reverse breakdown voltage	VR	IR=10uA	30			V
最大反向电流 Maximum reverse current	IR	VR=25V			0.5	uA
典型结电容 Type junction capacitance	C <sub>j</sub>	VR = 1.0V, f = 1MHz			10	pF
反向恢复时间 Reverse recovery time	trr	IF=IR=10mA Irr=0.1xIR, RL=100Ω			5	nS

# BAT42WS-BAT43WS

## SOD-S23 PACKAGE OUTLINE Plastic surface mounted package

SOD-323

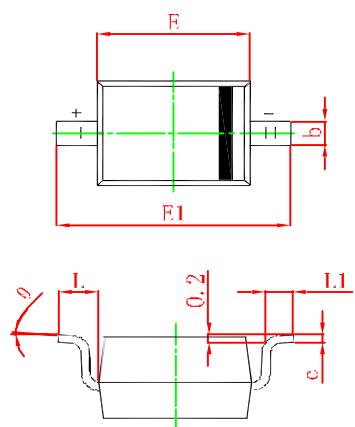

Symbol	Min.(mm)	Max.(mm)
<b>A</b>		1.000
<b>A1</b>	0.000	0.100
<b>A2</b>	0.800	0.900
<b>b</b>	0.250	0.350
<b>c</b>	0.080	0.150
<b>D</b>	1.200	1.400
<b>E</b>	1.600	1.800
<b>E1</b>	2.500	2.700
<b>L</b>	0.475REF	
<b>L1</b>	0.250	0.400
<b>θ</b>	<b>0°</b>	<b>8°</b>